

Ceiling Mounted PIR Switch





Features

- Ceiling mounted PIR sensor for movement detection
- Controlled by micro-processor and adopts a proprietary signal processing technique to avoid false triggers
- Adjustable delay timer from 2 to 60mins
- Adjustable ambient light override
- Easy-to-install to ceiling
- ABS-V0 flame retardant material

Specification & Wiring Diagram

Input Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliances	2000W
Load type	All types
Mounting hole diameter	60mm
Operation environment	20-90% RH, -20°C to 40°C
Working range	5 – 7m in diameter with mounting height of 2.4m
Unit dimension / weight	Dia. 77mm / 115g

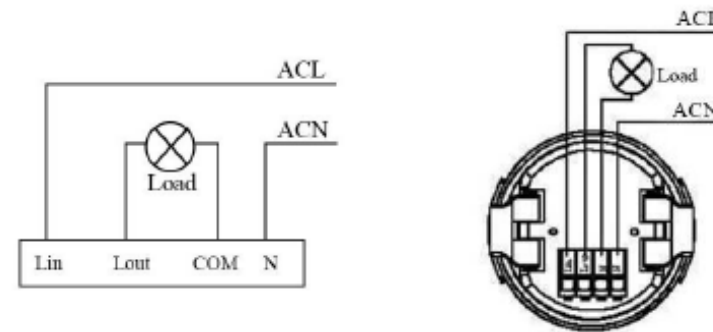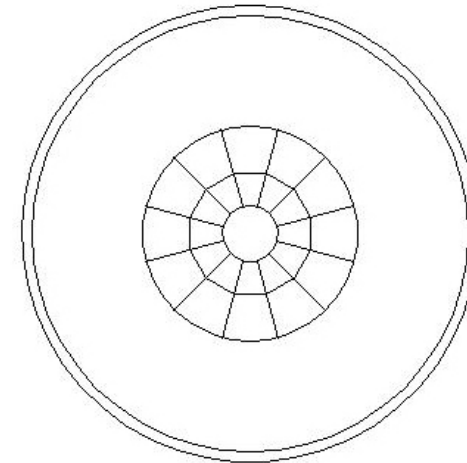

ISH-307C

IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- **Specification is subject to change without prior notice due to continuous product improvement**