


# Programmable Scheduled Timer



## Features


- Controlled by micro-processor which provides accurate scheduled timing
- Easy-to-install design to fit into standard wall box
- ISH-T402-A – can be set up to second
- ISH-T402-B – can be set up to minute
- Up to 20 timing schedules per day, and memory function for the settings
- LCD display
- Optional manual control or automatic control, user friendly key pads panel for easy settings
- Up to 2000W loading
- ABS-V0 flame retardant material

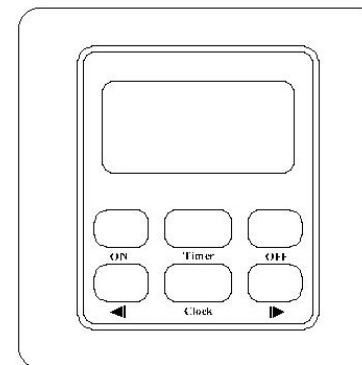

ISH-T402-A  
ISH-T402-B

## Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliances (max)	2000W
Operation environment	20-90% RH, -20°C to 40°C
Wall box dimension	75 x 75 x 50 mm
Mounting hole spacing	60mm
Wall mount unit dimension / weight	86 x 86 x 50.5 mm / 165g



## IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : [www.imasu.com](http://www.imasu.com), Email : [sales@imasu.com](mailto:sales@imasu.com)

- **Specification is subject to change without prior notice due to continuous product improvement**