

Speed Controller




Features



- On/off and variable speed controlled by rotary knob
- Adopt proprietary adaptive dimming technology to eliminate flickering and achieve maximum dimming range
- Up to 600W loading, with overheat protection
- Minimum speed setting to suit for different kinds of motors
- Easy-to-install design to fit into standard wall box
- ABS-V0 flame retardant material

Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliances	600W
Loading type	Motor
Operation environment	20-90% RH, -20°C to 55°C
Wall box dimension	75 x 75 x 50 mm
Mounting hole spacing	60mm
Wall mount unit dimension / weight	86 x 86 x 40 mm / 105g
Product weight	72g

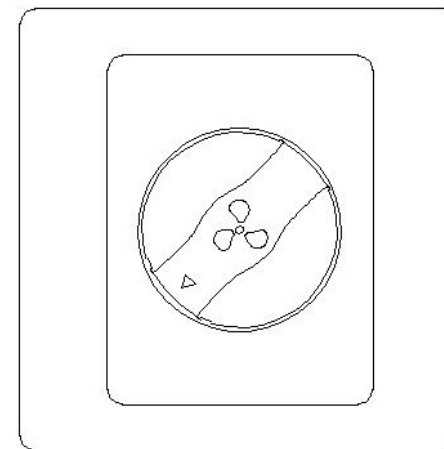

ISH-702



IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- *Specification is subject to change without prior notice due to continuous product improvement*