

Touch Button Timer




Features


- Controlled by microprocessor which provides accurate scheduled timing.
- Easy-to-install design to fit into standard wall box.
- 8 different time settings from 2 minutes to one hour, adjustable using dip switches
- With manual override
- ABS-V0 flame retardant material
- Good for all kinds of loads up to 2000W loading

Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliances (max)	2000W
Operation environment	20-90% RH, -20°C to 55°C
Wall box dimension	75 x 75 x 50 mm
Mounting hole spacing	60mm
Front cover dimension	86 x 86 x 43 mm
Product weight	72g

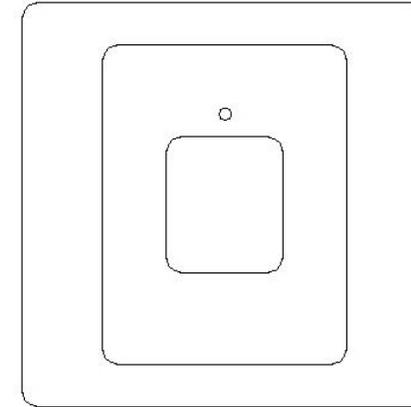

ISH-413

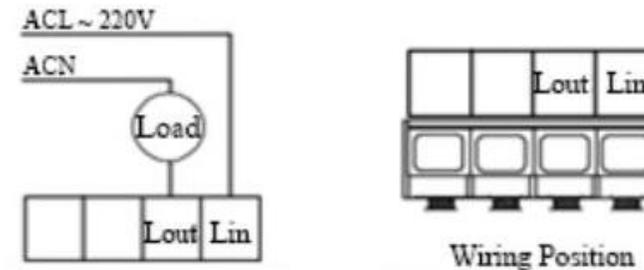

IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- **Specification is subject to change without prior notice due to continuous product improvement**