


Touch Timer Switch with Remote Controller



Features



- Touch pad timer switch with IR remote controller
- Controlled by micro-processor which provides accurate scheduled timing
- Easy-to-install design to fit into standard wall box
- With manual override
- ABS-V0 flame retardant material
- Good for all kinds of loads
- Control up to 4 loads. Each load can have a delay time of 30 seconds or instant on/off

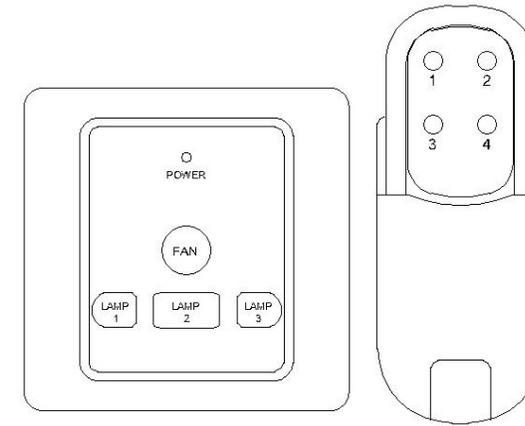

ISH-601

Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliance (max)	150W
Input power of applied lamp (max)	Resistive: 1000W/load Inductive: 500W/load Capacitive: 500W/load
Remote control code	IR
Operation environment	20-90% RH, -20°C to 40°C
Wall box dimension	75 x 75 x 50 mm
Mounting hole spacing	60mm
Wall mount unit dimension	86 x 86 x 43 mm / 84g
Remote control dimension / weight	107 x 36 x 14 mm / 31g
Remote control effective distance	7m



Wiring Position

IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- *Specification is subject to change without prior notice due to continuous product improvement*