



Wi-Fi/RF Ceiling Fan Remote Control Kit

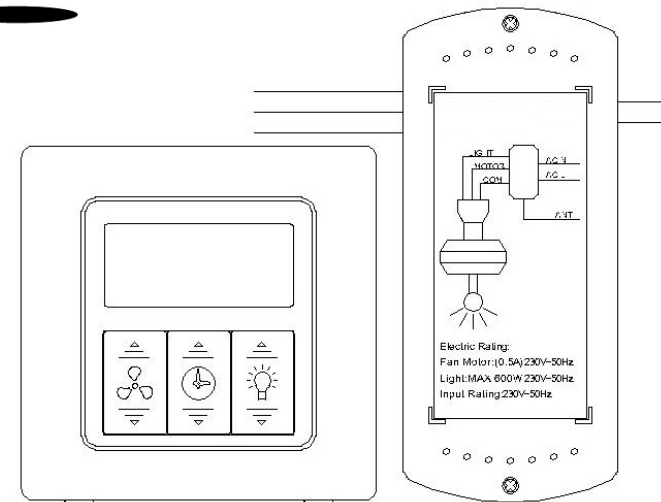

Features


- With 433Mhz RF Remote Controller
- With Smartphone control by Wi-Fi connection
- Applicable to ceiling fans
- 2-way control for fans and lights
- 3-speed control
- Timer function
- Bidirectional communication enables status display of fans, lights and timers
- ABS-V0 fire retardant material
- Elegant design



ISH-280

Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied fan (max)	150W
Input power of applied light (max)	600W
Battery for remote control	AAA
Operation environment	20-90% RH, -20°C to 40°C
Working distance of remote control	>= 10m
Remote control dimension	86 x 86 mm
Receiver dimension	120 x 53 x 23 mm
Wall mount unit dimension	86 x 86 x 50.5 mm / 139g

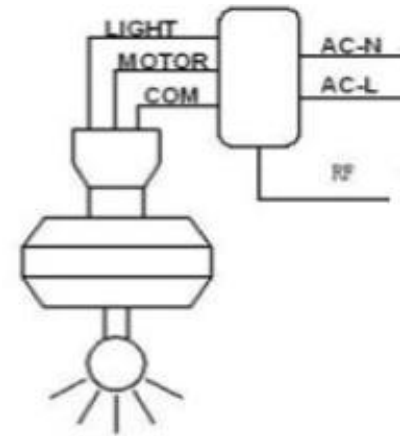

IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- *Specification is subject to change without prior notice due to continuous product improvement*